

www.neokorea.net



- Air compressor
- Air cleaning system

NEOKOREA AIR COMPRESSOR

네오코리아-에어컴프레샤



(주)네오코리아

AIR COOLED PISTON AIR COMPRESSOR

뛰어난 내구성

정밀설계와 특수 재질, 특수열처리기술로 고온에서도 마모와 변형이 적어 긴수명을 보장합니다.

저소음, 저진동 (실용신안 제 0336348호)

오랜 연구 끝에 소음공해를 유발하는 Piston Compressor의 단점을 완전히 해결하였고, 특히 경험이 많은 기술진의 반복된 실험 결과로 부드러운 저속, 왕복운동을 실현시켰습니다.

Automatic Pressure Switch Type와 Automatic Unloader Type 채택


Compressor의 수명을 연장시켰고 적절한 공기량을 확보하게 되었습니다.

높은 토출효율 (실용신안 제 0336349호)

독자설계에 의한 뛰어난 냉각효율을 자랑하는 실린더로 외관이 미려하며 Compressor의 수명 또한 연장시켰습니다.

낮은 윤활유 소모

네오코리에서 독자 개발한 실린더는 뛰어난 냉각효과를 자랑합니다. 낮은 온도로 작동되며 깨끗하고 청정한 압축 공기를 생산하고 윤활유의 수명 또는 연장시켰습니다.

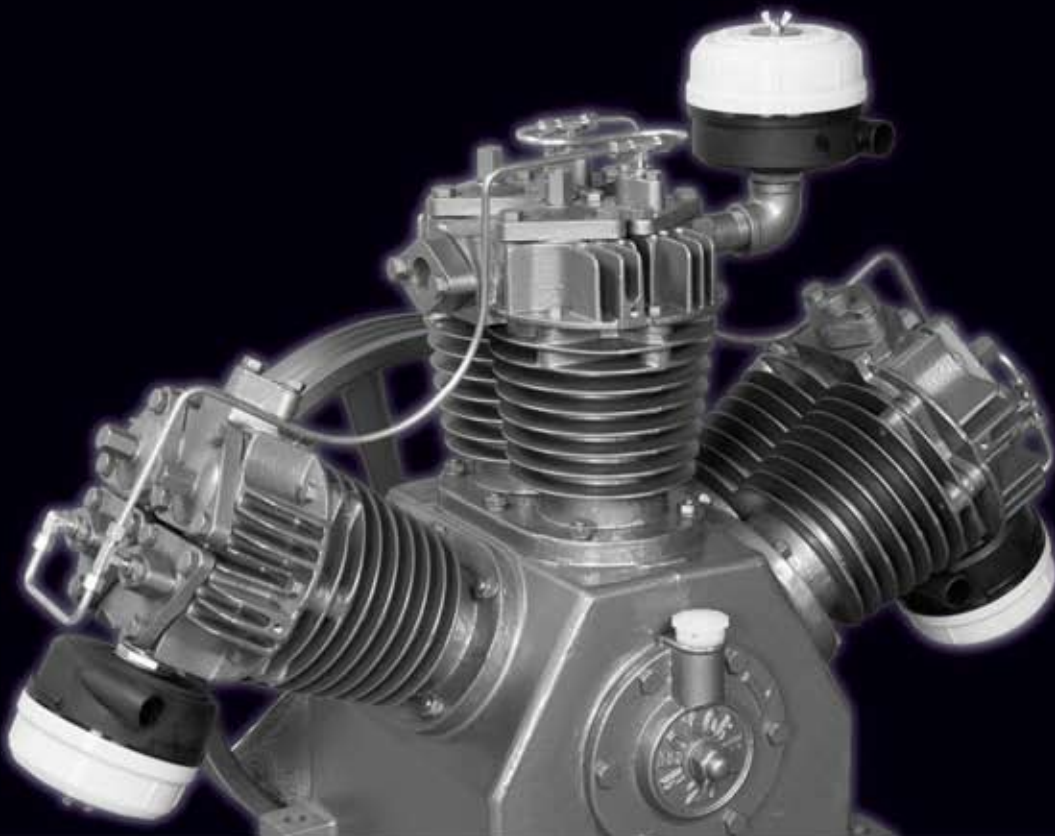



● NKP-5 (5hp/148 ℓ)



● NKP-7 (7.5hp/148 ℓ)



● NKP-10 (10hp/240 ℓ)

AIR COOLED PISTON AIR COMPRESSOR

NKP-15 (15hp/280 ℓ)



NKP-510 (10hp/500 ℓ)

NKP-515 (15hp/500 ℓ)





● NKP-20 (20hp/280 ℓ)



● NKP-520 (20hp/500 ℓ)

AIR COOLED PISTON AIR COMPRESSOR ENGINE



• **NKP-5/7**
(618~934 ℓ /min)



• **NKP-10/15**
(1272~1909 ℓ /min)



• **NKP-20**
(2519 ℓ /min)

ENGINE

Specifications & Dimensions

Model	output	Wofking pressure	Piston displacemen	Compressor		Air Receiver Tank	Air Outlet	Air Outlet	Weight (withou motor)
	Kw(HP)	kgf/cm ²	ℓ /min	Bore/Stroke No.of Cyl. mm X mm XQT t	RPM	ℓ	PF	mm X mm X mm kg	
NKP-5	3.7(5)	7.5~9.9	618	90×108×2	450	148	1/2B×2	1450×520×1120	193
NKP-7	5.5(7.5)	7.5~9.9	934	90×108×2	680	148	1/2B×2	1450×520×1120	193
NKP-10	7.5(10)	7.5~9.9	1272	90×100×4	500	240	1B×1	1670×630×1150	325
NKP-15	11(15)	7.5~9.9	1909	90×100×4	750	280	1B×1	1850×630×1150	345
NKP-20	15(20)	7.5~9.9	2519	90×100×6	660	280	1B×1	1850×630×1210	514
NKP-510	7.5(10)	7.5~9.9	1272	90×100×4	500	500	1B×1	1850×700×1320	380
NKP-515	11(15)	7.5~9.9	1909	90×100×4	750	500	1B×1	1850×700×1320	385
NKP-520	15(20)	7.5~9.9	2519	90×100×6	660	500	1/4B×1, 1B×1	1850×700×1320	555



www.neokorea.net



(주)네오코리아

본사 및 공장 : 경기도 화성시 양감면 신왕리 810-3
TEL : (031)366-2600~1 FAX : (031)366-2602

※본 카더로그의 일부사양 및 Dimensions은 바뀔 수 있습니다.